

Certified by ISO9001 International Quality Control System

JXM-400VI Series Pedestrian Lamps

Features

- Compliance with latest ITE specifications
- Retrofit design & UV stabilized lens
- MIL-STD-883 mechanical vibration
- MIL-STD-810F moisture resistant
- Compliance with FCC Title 47
- Full compatibility with NEMA controllers/conflict monitors

Dimensions

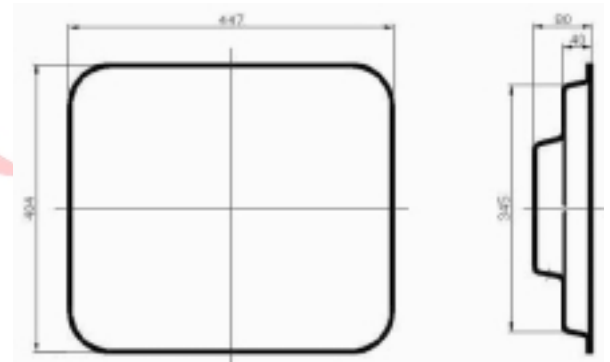


Fig. A



Fig. B

Model Number	Figure	Size (mm)		Config.	Symbol		Voltage (Typical)	Voltage Range 60 Hz(AC)	Power (W)	
		Inches	mm		Hand	Person			Hand	Person
JXM-400VIA	A	16x18	407x450	Side by Side	Full	Full	120V~60hz	80v~135v	7	7
JXM-400VIAIL	B	16x18	407x450	Side by Side	Full	Full	120V~60hz	80v~135v	7	7

All characteristics, including visual characters, chromaticity, moisture and vibration resistance, electronic noise, transient protection, etc., are in compliance with the standards specified in ITE LED Pedestrian Signal Modules.

For additional technical information or sales support regarding these and other LED products, please contact: