

Access Point Controller Card (APCC)


The Sensys Networks Access Point Controller Card (APCC), is a second generation controller card that maintains low power consumption, supports multiple radios, and allows for additional communication and processing power. The APCC, which is compatible with all of Sensys Networks VDS240 Wireless Vehicle Detection System products, receives and processes data from the sensors. The APCC then relays the sensor detection data to a roadside traffic controller or remote server traffic management system.

The APCC, along with the APCC radio, maintains two-way wireless links to an installation's sensors and repeaters, establishes overall time synchronization, and transmits configuration commands and message acknowledgements.

Types of APCC configurations. The APCC single-slot configuration consists of dual APCC radio ports, Sensys Networks Expansion (EX) port, and contact closure interface via backplane to a traffic controller. It also has dual USB 2.0 full speed host ports and 10/100Base-T network access. The APCC dual-slot configuration adds an SD memory card, real-time battery-backed clock, optional dual serial (DB9) interface*, and an optional second serial port or built in cellular modem.

* Full handshake control - COMM1 only

APCC system. The minimum APCC system consists of an APCC and one SPP radio. The system can also consist of multiple SPP radios and an isolator that offers electrical isolation up to 1500V, surge protection up to 1500V, and AC power cross protection.

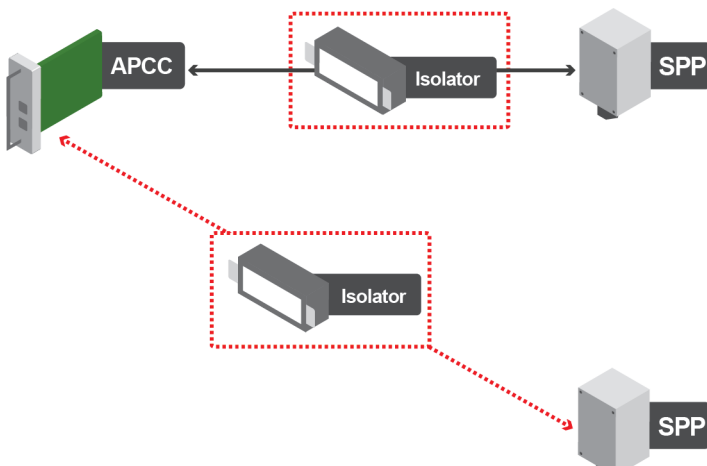

Functions/Features

Sensys Networks radio communications

- To/from Sensys Networks APCC radio
- To/from Sensys Networks repeaters

Relay of sensor data

- Via contact closure signals to traffic controller
- Via IP connectivity (wired or wireless) to traffic management systems, upstream servers, etc.
- Integrated cellular data modem (optional)

Processing of sensor data

- Per-lane or per-vehicle data
- Data binning over selectable time intervals
- Data filtering (e.g., adaptive holdover)

Storage of sensor data

- Data buffering (event caching) 500 K
- Data storage (processed data) 1 M
- MMC/HCS D retractable memory (optional)

Master timebase for all supported wireless sensors

- Common clock for sensor timestamps
- Can be synchronized to NIST timing signals

Radio signal quality measurements

- Receive Signal Strength Indicator (RSSI, in dBm)
- Link Quality Index (LQI, figure of merit)

Firmware upgrades

- Can be upgraded via IP connectivity or via local PC connection
- Can deliver upgrades to all other Sensys Networks devices

Simple installation

- Any roadside location that provides adequate signal coverage to sensors/repeaters
- No special requirements regarding setback, relative angle of the sun, or mounting stability

Low power consumption

No calibration or adjustment required

Functional Specifications

interfaces	<ul style="list-style-type: none"> communicates with traffic controller via 2x22 pin edge connector to backplane (2) RS-422 full duplex to APCC radio(s) via RJ45 connector (2) USB 2.0 full speed RS-485 full duplex to EX cards via RJ45 connector 10/100Base-T network access via RJ45 connector to/from configuration device (PC) via TCP/IP over 10/100Base-T Ethernet to/from central network management / data collection facilities via TCP/IP <ul style="list-style-type: none"> 10 /100Base-T Ethernet cellular data modem
IP connectivity	<ul style="list-style-type: none"> HTTP, PPP, PPTP, SSH, optional encryption over tunnel 10/100Base-T via RJ45 connector GSM GPRS connectivity (optional) <ul style="list-style-type: none"> dual-band 850/1900 MHz GSM (N. American version) dual-band 900/1800 MHz GSM (int'l version) up to 85.6 kbps CDMA2000 1xRTT connectivity (optional) <ul style="list-style-type: none"> dual-band 800/1900 MHz CDMA (per specific cellular service provider) up to 153.6 kbps
per-lane data processing	<ul style="list-style-type: none"> counts (volume) occupancy average and median speeds binned speeds and vehicle lengths over selectable time intervals
per-vehicle data processing	<ul style="list-style-type: none"> initial vehicle detect time gap speed length
memory processor	<ul style="list-style-type: none"> 400 MHz ARM9 processor Linux 2.6 operating system 1 GB Flash 64 MB RAM
over-the-air protocol	Sensys Networks NanoPower (SNP) protocol (TDMA)
physical layer protocol	IEEE 802.15.4 PHY
modulation	Direct Sequence Spread Spectrum Offset Quadrature Phase-Shift Keying (DSSS O-QPSK)
transmit/receive bit rate	250 kbps
frequency band	2400 to 2483.5 MHz (ISM unlicensed band)
frequency channels	Up to 16
channel bandwidth	Up to 2 MHz
antenna type	microstrip patch antenna (behind front face panel)
antenna field of view	±60° (azimuth & elevation)
nominal output power	0 dBm
spurious emissions	<ul style="list-style-type: none"> 30 - 1000 MHz: < -36 dBm 1 - 12.75 GHz: < -30 dBm 1.8 - 1.9 GHz: < -44 dBm 5.15 - 5.3 GHz: < -47 dBm
typical receive sensitivity	-101 dBm (PER ≤ 1%)

saturation (max input level)	≥ 10 dBm
-------------------------------------	----------



Power, Physical, & Environmental

input voltage	<ul style="list-style-type: none"> 22-26 VDC (24VDC nominal) 9-15 VDC (12 VDC nominal)
power consumption	less than 700 mW (min w/out cell modem)
dimensions	<ul style="list-style-type: none"> single-slot: 7" x 4.5" x 1.1" (18 cm x 11.4 cm x 3 cm) double-slot: 7" x 4.5" x 2.3" (18 cm x 11.4 cm x 6 cm) (optional) APCC-SPP: 4.7" x 3.5" x 2.4" (12 cm x 9 cm x 6 cm) Isolator: 6.5" x 3" x 1.3" (17 cm x 8 cm x 3 cm)
weight	<ul style="list-style-type: none"> single-slot: 7.9 oz (224 g) double-slot: 10.5 oz (298 g) (optional) APCC-SPP: 14.1 oz (400 g) Isolator: 5.6 oz (159 g)
environmental	TBD
operating temp	industrial -40°C to 80°C

APCC Front Panel User Interface

controls	<ul style="list-style-type: none"> MASTER RESET: reset board CHANNEL RESET: ignore events and clear pending events (all channels)
LEDs	<ul style="list-style-type: none"> CH1, CH2, CH3, CH4: on/vehicle present or no sensors detected; off/vehicle not present or channel disabled; blinking: vehicle detected LINK: on/operational; off/no link; blinking/active FAULT: on/an enabled channel has a fault
switches	<ul style="list-style-type: none"> RX termination for SPP ports shelf and slot address

Compliance

safety	2006/95/EC 
EMC	<ul style="list-style-type: none"> FCC: This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. 2004/108/EC 

Available Products

Products	Description	Detection Data Interfaces		
		10/100 Base-T	GSM/ GPRS	CDMA200 1xRTT
APCC-M	APCC Module	●		
APCC-M-E	APCC Module with Enhanced Ethernet	●		
APCC-MP-E	APCC Module, Peripheral Support (I/O Board without modem)	●		
APCC-MP-EA	APCC Module Peripheral Support	●		●
APCC-MP-EG	APCC Module Peripheral Support	●	●	
APCC-MP-EV	APCC Module Peripheral Support	●		●
APCC-ACC-1	APCC Accessory Isolator			
APCC-SPP	APCC Serial Port Protocol (Digital Radio)			



Local Distributor

Sensys Networks and the Sensys Networks logo are trademarks of Sensys Networks, Inc. All other trademarks are the property of their respective owners.

Information contained herein is believed to be reliable, but Sensys Networks makes no warranties as to its accuracy or completeness.

Copyright © 2011 Sensys Networks, Inc. • ALL RIGHTS RESERVED • P/N 153-240-030-003 Rev B